



[www.aopled.com](http://www.aopled.com)

**American Opto Plus LED Corp.**  
**0.30" Case Mold Type LED Display**  
**AOP A301YG G/W**  
**AOP C301YG G/W**

● **EDIT HISTORY**

Version A : Jan. 25, 2016  
Preliminary Spec.

| Manufacture | Examination | Approving |
|-------------|-------------|-----------|
|             |             |           |



[www.aopled.com](http://www.aopled.com)

# American Opto Plus LED Corp.

## 0.30" Case Mold Type LED Display

### AOP A301YG G/W

### AOP C301YG G/W

### ● FEATURES

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Case mold type.
- Gray face, White segment.
- RoHS compliant, Pb Free.

### ● DESCRIPTION

The A301YG G/W & C301YG G/W is a 0.30 inch (7.62 mm) height single 7-segment display. This device utilizes Super Bright Yellow Green LED chip which are made from AlGaInP on a transparent GaAs substrate. The display has Gray face, White segment.

### ● DEVICE

| PART NO<br>Super Bright Yellow Green | DESCRIPTION    |
|--------------------------------------|----------------|
| A301YG G/W                           | Common Anode   |
| C301YG G/W                           | Common Cathode |

**RoHS Compliance**



**Pb free.**





www.aopled.com


# American Opto Plus LED Corp.

## 0.30" Case Mold Type LED Display

### AOP A301YG G/W




### AOP C301YG G/W

### ● MECHANICAL DIMENSIONS

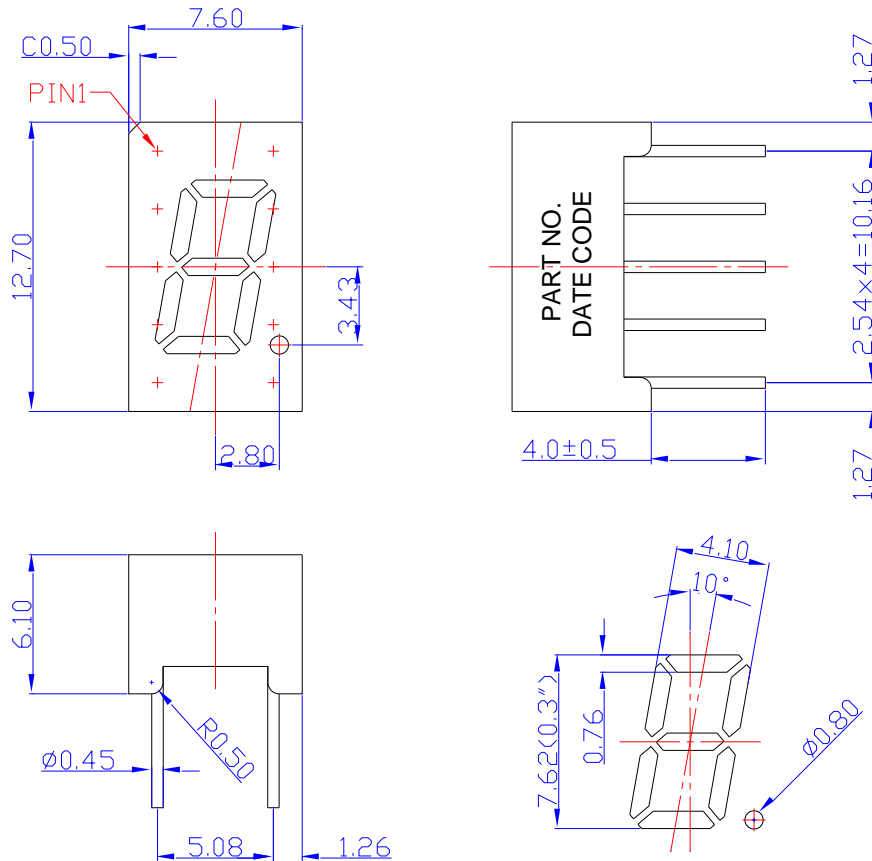

NOTES: All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm unless otherwise noted.

### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

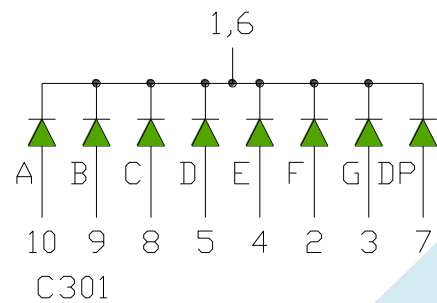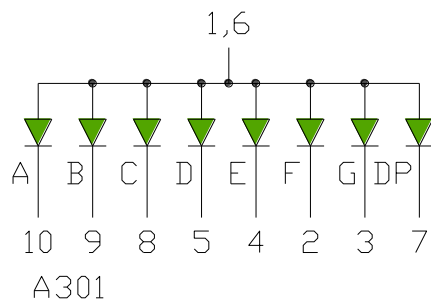



[www.aopled.com](http://www.aopled.com)

**American Opto Plus LED Corp.**  
**0.30" Case Mold Type LED Display**  
**AOP A301YG G/W**  
**AOP C301YG G/W**

● **YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

| Parameter                                     | Symbol           | Super Bright Yellow Green | Unit    |
|---|------------------|---------------------------|---------|
| Power dissipation per dice                    | P <sub>AD</sub>  | 85                        | mW      |
| Derating liner from 25°C per dice             | -                | 0.42                      | mA / °C |
| Continuous forward current per dice           | I <sub>AF</sub>  | 30                        | mA      |
| Peak current per dice (duty cycle 1/10, 1kHz) | I <sub>PF</sub>  | 120                       | mA      |
| Reverse voltage per dice                      | V <sub>R</sub>   | 5                         | V       |
| Operating temperature                         | T <sub>OPR</sub> | -25 to +85                | °C      |
| Storage temperature                           | T <sub>STG</sub> | -25 to +85                | °C      |

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

| Characteristic               | Symbol         | Condition            | Min. | Typ. | Max. | Unit |
|------------------------------|----------------|----------------------|------|------|------|------|
| Forward Voltage              | V <sub>F</sub> | I <sub>F</sub> =20mA | -    | 2.1  | 2.6  | V    |
| Reverse Current              | I <sub>R</sub> | V <sub>R</sub> =5V   | -    | -    | 10   | μA   |
| Peak Wavelength              | λ <sub>P</sub> | I <sub>F</sub> =20mA | -    | 573  | -    | nm   |
| Dominant Wavelength          | λ <sub>D</sub> | I <sub>F</sub> =20mA | -    | 571  | -    | nm   |
| Luminous intensity           | I <sub>v</sub> | I <sub>F</sub> =20mA | -    | 20   | -    | mcd  |
| Spectrum Radiation Bandwidth | Δλ             | I <sub>F</sub> =20mA | -    | 20   | -    | nm   |



[www.aopled.com](http://www.aopled.com)

# American Opto Plus LED Corp.

## 0.30" Case Mold Type LED Display

### AOP A301YG G/W

### AOP C301YG G/W

#### ● YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

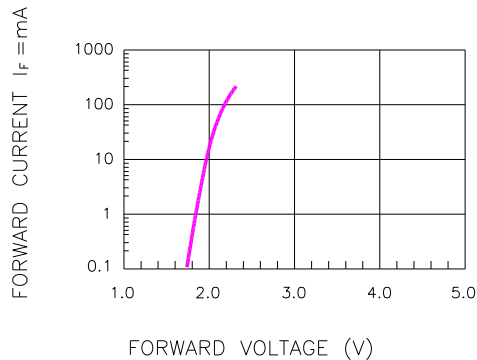


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

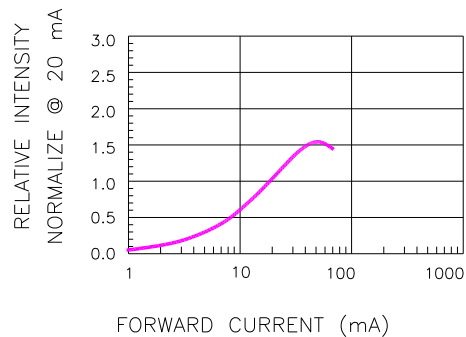


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

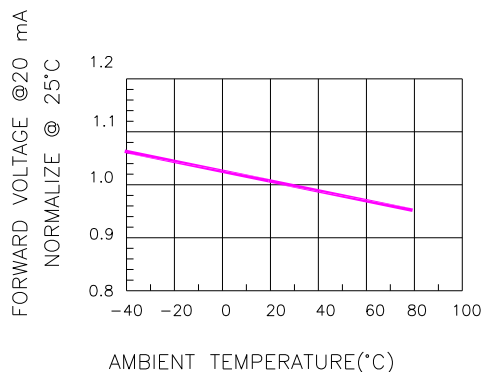


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

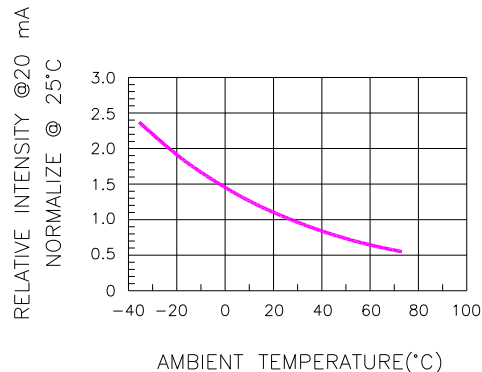


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

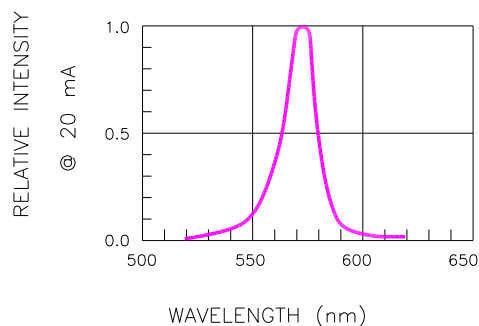


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

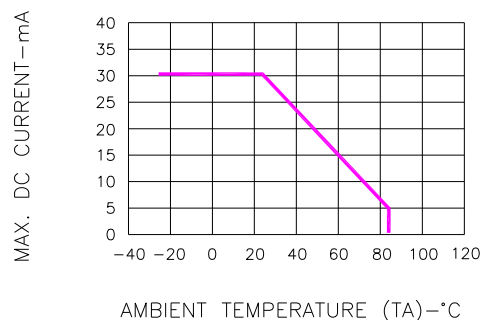


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE



[www.aopled.com](http://www.aopled.com)


# American Opto Plus LED Corp.

## 0.30" Case Mold Type LED Display

### AOP A301YG G/W

### AOP C301YG G/W

## ● RECOMMEND SOLDERING PROFILE

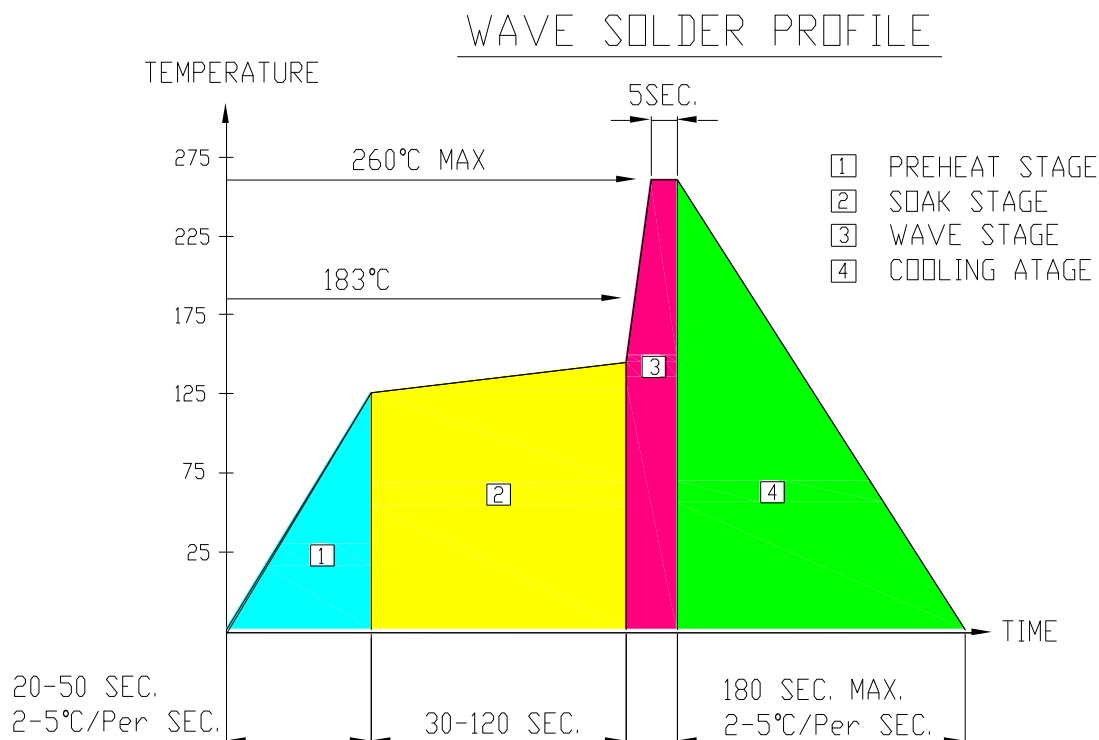

## ● Note:

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

## ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

## ● REWORK

Customer must finish rework within  $\leq 3$  sec under 350°C.  
The head of soldering iron cannot touch copper foil.