




American Opto Plus LED Corp.

L354L-ED-H306

3mm Red LED Lamp W/ Holder

PACKAGE DIMENSION

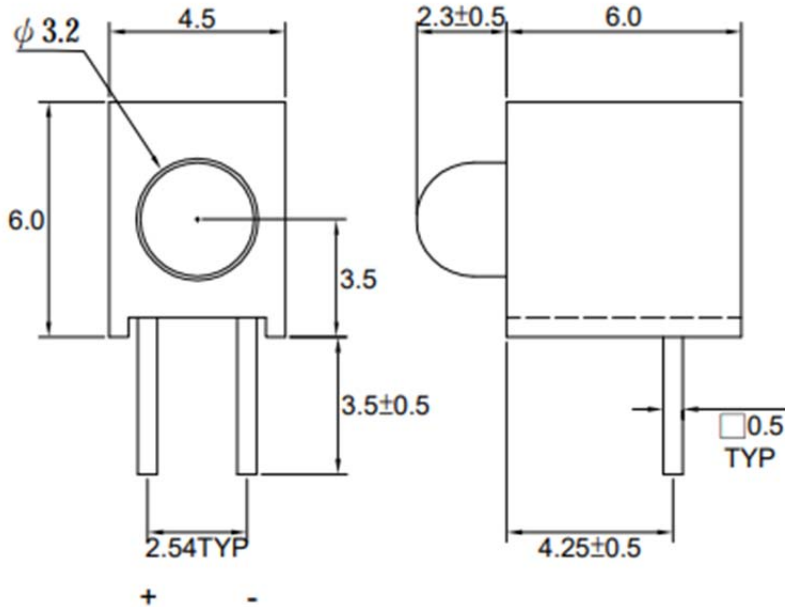

Notes:

1. All dimension are in millimeter tolerance is ± 0.25 mm unless otherwise noted
2. Specifications are subject to change without notice.

Material	Color	
	Emitted	Lens
GaAsP/GaP	Red	Red Diffused



American Opto Plus LED Corp.

L354L-ED-H306

3mm Red LED Lamp W/ Holder

ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

Parameter	Symbol	Value	Unit
Forward Current	If	30	mA
Peak Forward Current Duty 1/10 @ 10KHz	Ifp	120	mA
Power Dissipation	Pd	100	mW
Reverse Current @ 5V	Ir	10	μA
Operating Temperature Range	Topr	-40~+85	°C
Storage Temperature Range	Tstg	-40~+100	°C

OPTICAL-ELECTRICAL CHARACTERISTICS

(Ta=25°C)

Parameter	Symbol	Test Condition	Value			Unit
			Min	Typ	Max	
Luminous intensity	Iv	IF = 10mA	8.0	30	--	mcd
Peak Wavelength	λP	IF = 20mA	--	635	--	nm
Spectral Halfwidth	Δλ		--	45	--	nm
Forward Voltage	Vf		1.7	--	2.6	V
Viewing angle	2θ ½		--	50	--	Deg

Notes:

1. The forward voltage data did not including ±0.1V testing tolerance.
2. The luminous intensity data did not including ±15% testing tolerance.



American Opto Plus LED Corp.

L354L-ED-H306

3mm Red LED Lamp W/ Holder

LUMINOUS INTENSITY CLASSIFICATION

(IF=10mA)

Bin Code	Min	Max	Unit
A9	8	12	mcd
A10	12	20	
A11	20	30	

COLOR BIN CLASSIFICATION

(IF=10mA)

Bin Code	Min	Max	Unit
28	625	630	nm
29	630	635	
30	635	640	



American Opto Plus LED Corp.

L354L-ED-H306

3mm Red LED Lamp W/ Holder

ELECTRICAL-OPTICAL CHARACTERISTIC CURVES

(Ta=25°C)

Fig.1 Forward current vs. Forward Voltage

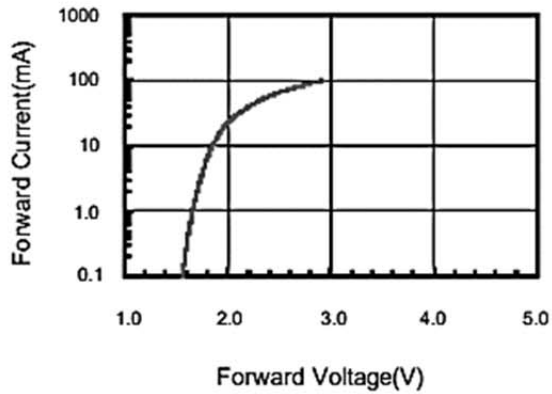


Fig.2 Relative Intensity vs. Forward Current

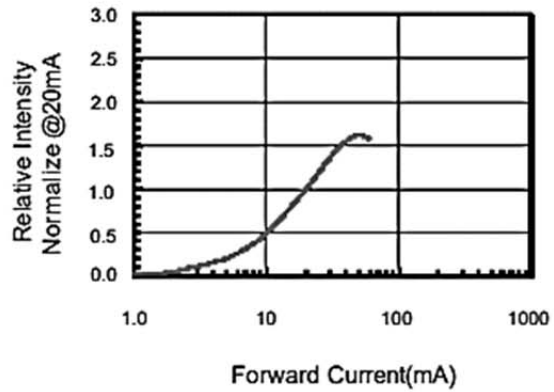


Fig.3 Forward Voltage vs. Temperature

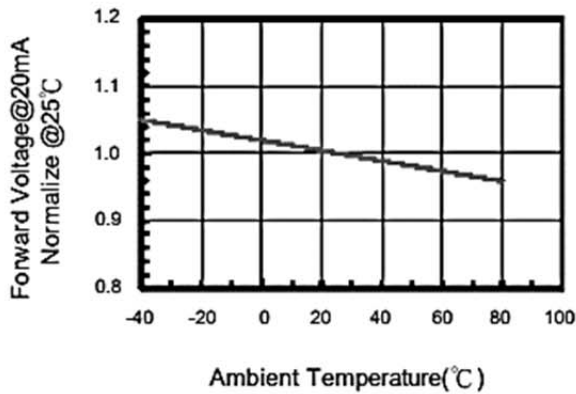


Fig.4 Relative Intensity vs. Temperature


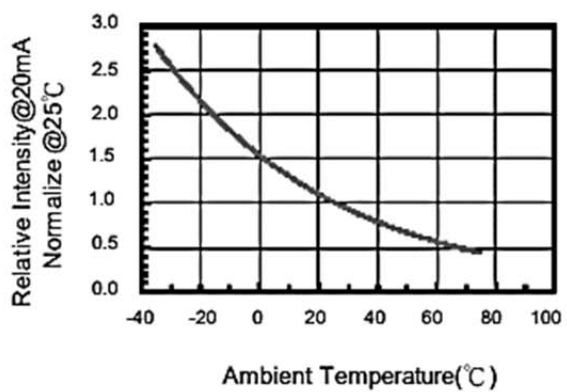


Fig.5 Relative Intensity vs. Wavelength



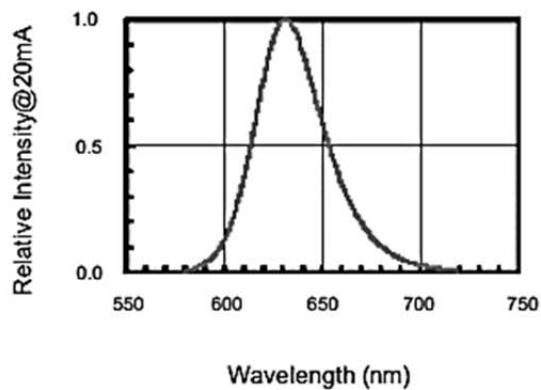

American Opto Plus LED Corp.

L354L-ED-H306

3mm Red LED Lamp W/ Holder

RECOMMENDED SOLDERING CONDITIONS

1. Iron:

Soldering Iron: 30W Max

Temperature: 350°C Max

Soldering time: 3 Seconds Max (one time only)

Distance: 2mm (from solder joint body)

2. Wave Soldering Profile

Dip Soldering

Preheat: 120°C Max

Preheat Time: 60 Seconds Max


Ramp-up: 2°C/sec Max

Ramp-down: -5°C/sec Max

Solder Bath: 260°C Max

Dipping Time: 3 Seconds Max

Distance: 2mm (from solder joint body)

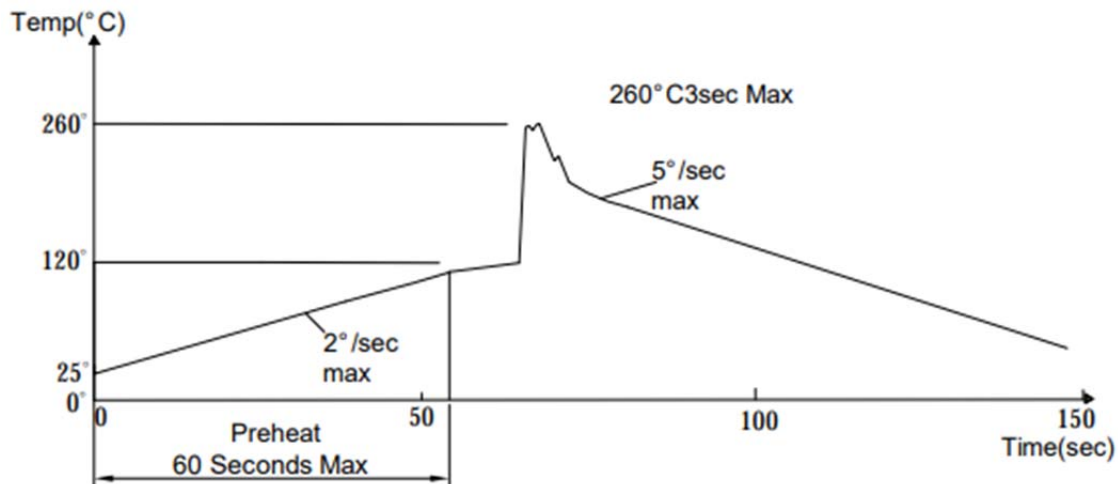



American Opto Plus LED Corp.

L354L-ED-H306

3mm Red LED Lamp W/ Holder

RELIABILITY TEST

Test Item	Test Condition	Description	Reference Standard
Operating Life Test	1.Under Room Temperature 2.If=20mA 3.t=1000 hrs (-24hrs, +72hrs)	This test is conducted for the purpose of determining the resistance of a part in electrical and thermal stressed.	MIL-STD-750: 1026 MIL-STD-883: 1005 JIS C 7021: B-1
High Temperature Storage Test	1.Ta=105 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs)	The purpose of this is the resistance of the device which is laid under condition of high temperature for hours.	MIL-STD-883:1008 JIS C 7021: B-10
Low Temperature Storage Test	1.Ta=-40 °C±5°C 2.t=1000 hrs (-24hrs, +72hrs)	The purpose of this is the resistance of the device which is laid under condition of low temperature for hours.	JIS C 7021: B-12
High Temperature High Humidity Test	1.Ta=65°C±5°C 2.RH=90 %~95% 3.t=240hrs ±2hrs	The purpose of this test is the resistance of the device under tropical for hours.	MIL-STD-202:103B JIS C 7021: B-11
Thermal Shock Test	1.Ta=105 °C±5°C&-40 °C±5°C (10min) (10min) 2.total 10 cycles	The purpose of this is the resistance of the device to sudden extreme changes in high and low temperature.	MIL-STD-202: 107D MIL-STD-750: 1051 MIL-STD-883: 1011
Solder Resistance Test	1.T.Sol=260 °C±5°C 2.Dwell time= 10 ±1sec.	This test intended to determine the thermal characteristic resistance of the device to sudden exposures at extreme changes in temperature when soldering the lead wire.	MIL-STD-202: 210A MIL-STD-750: 2031 JIS C 7021: A-1
Solderability Test	1.T.Sol=230 °C±5°C 2.Dwell time=5 ±1sec	This test intended to see soldering well performed or not.	MIL-STD-202: 208D MIL-STD-750: 2026 MIL-STD-883: 2003 JIS C 7021: A-2